



JMSH0606PG

Features


- Excellent $R_{DS(ON)}$ and Low Gate Charge
- 100% UIS Tested
- 100% V_{ds} Tested
- Halogen-free; RoHS-compliant

Product Summary


Parameters	Value	Unit
V_{DSS}	60	V
$V_{GS(th_Typ)}$	2.9	V
$I_D(@V_{GS}=10V)$	114	A
$R_{DS(ON_Typ)}(@V_{GS}=10V)$	4.5	$m\Omega$

Applications


- Load Switch
- PWM Application
- Power Management

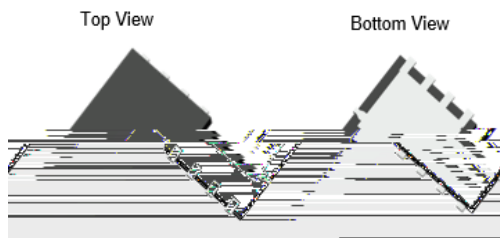

PDFN5X6-8L

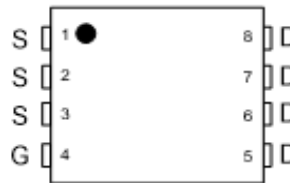

Pin Assignment



Schematic Diagram

Ordering Information

Device	Marking	MSL	Form	Package	Reel(pcs)	Per Carton (pcs)
JMSH0606PG-13	SH0606P	1	Tape&Reel	PDFN5x6-8L	5000	50000

Absolute Maximum Ratings (@ $T_C = 25^\circ C$ unless otherwise specified)

Symbol	Parameter	Value	Unit
V_{DS}	Drain-to-Source Voltage	60	V
V_{GS}	Gate-to-Source Voltage	± 20	V
I_D	Continuous Drain Current	$T_C = 25^\circ C$	114
		$T_C = 100^\circ C$	72
I_{DM}	Pulsed Drain Current ⁽¹⁾	Refer to Fig.4	A
E_{AS}	Single Pulsed Avalanche Energy ⁽²⁾	188	mJ
P_D	Power Dissipation	$T_C = 25^\circ C$	104
		$T_C = 100^\circ C$	42
T_{J_STG}	Junction & Storage Temperature Range	-55 to 150	$^\circ C$

Thermal Characteristics

Symbol	Parameter	Max	Unit
R	Thermal Resistance, Junction to Ambient ⁽³⁾	43	$^\circ C/W$
R	Thermal Resistance, Junction to Case	1.2	



Typical Performance Characteristics

Typical Performance Characteristics

Figure 5: Output Characteristics

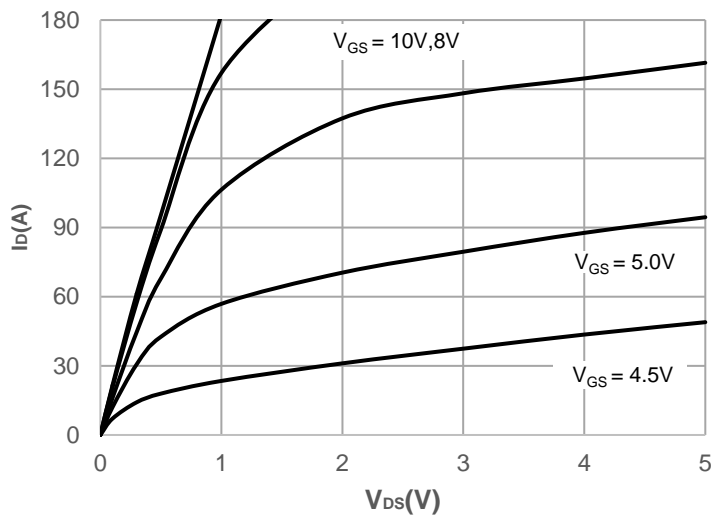


Figure 7: On-resistance vs. Drain Current

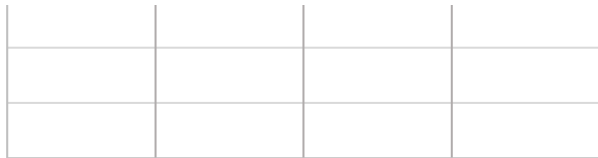


Figure 6: Typical Transfer Characteristics

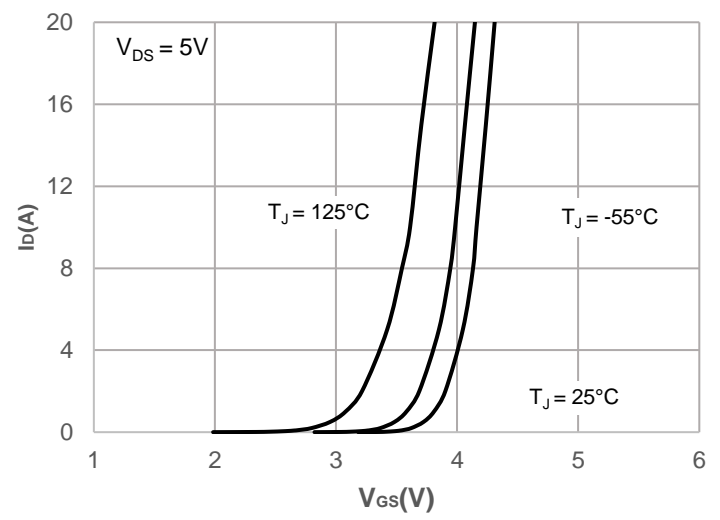


Figure 8: Body Diode Characteristics





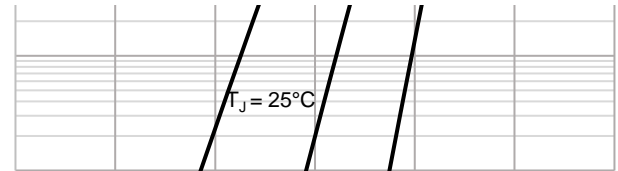


Figure 9: Gate Charge Characteristics

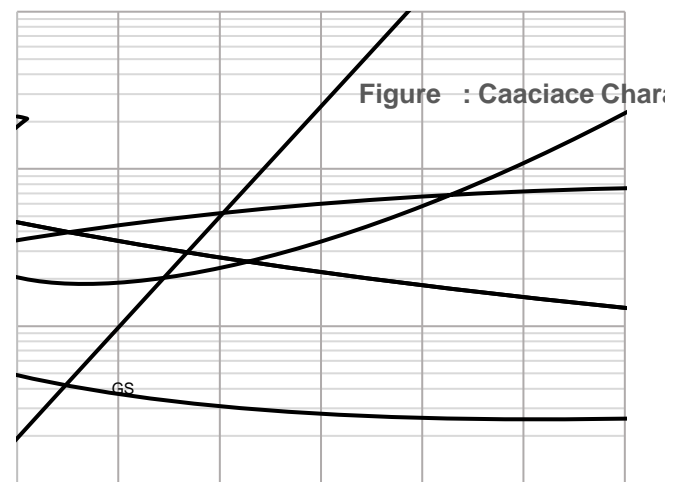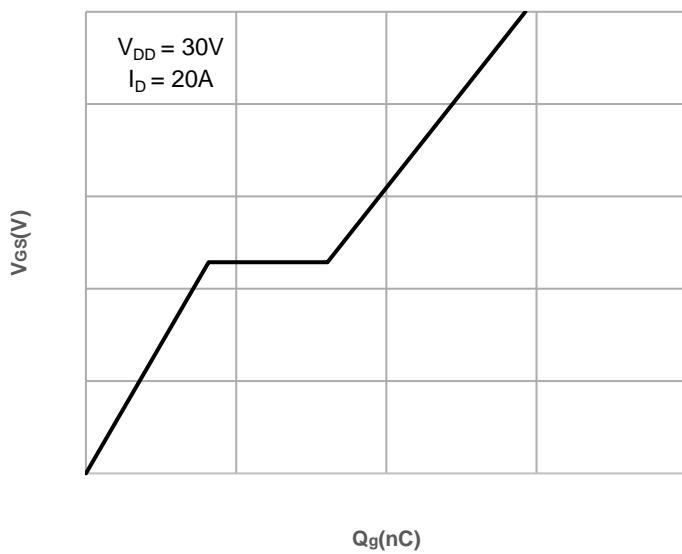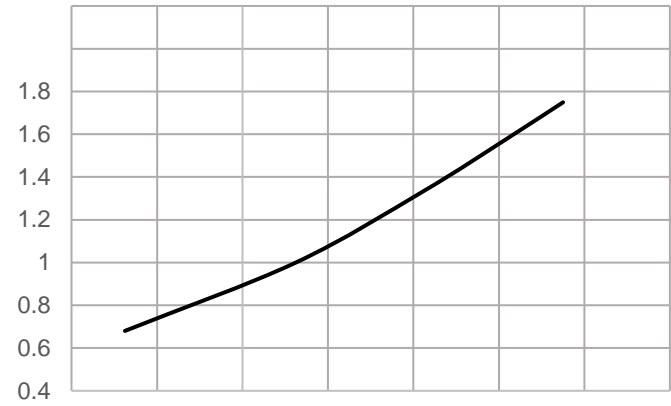

Typical Performance Characteristics

Figure 11: Normalized Breakdown voltage vs. Junction Temperature

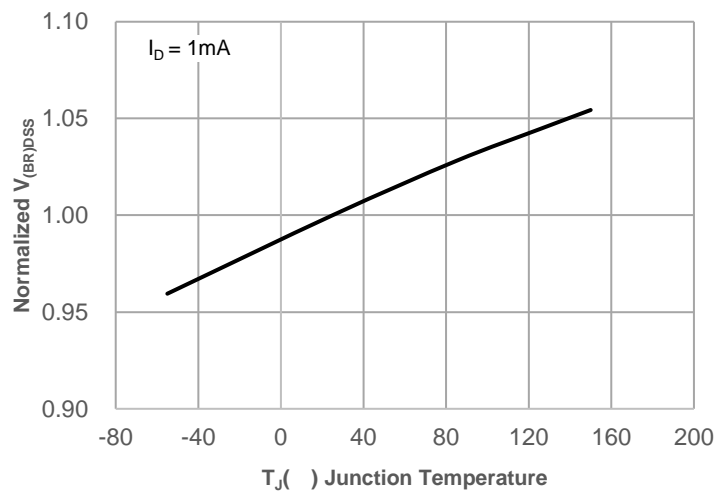

Test Circuit



Figure 1: Gate Charge Test Circuit & Waveform

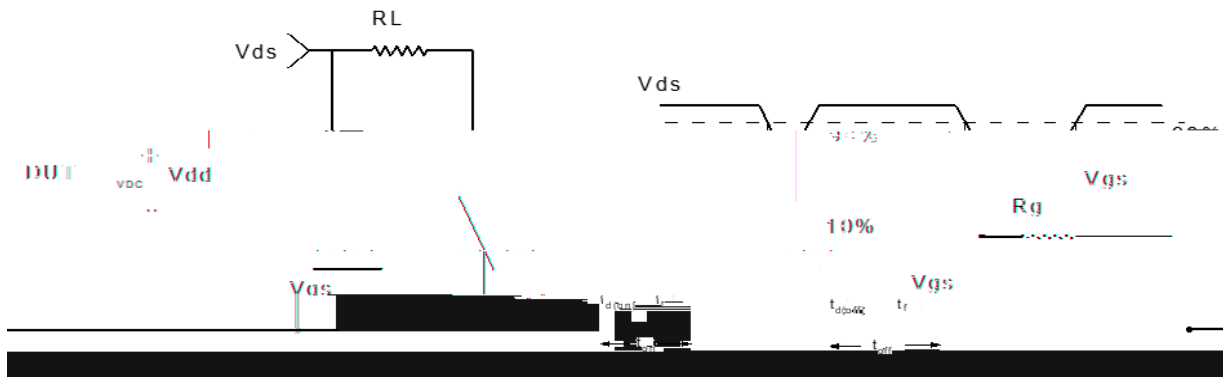


Figure 2: Resistive Switching Test Circuit & Waveform

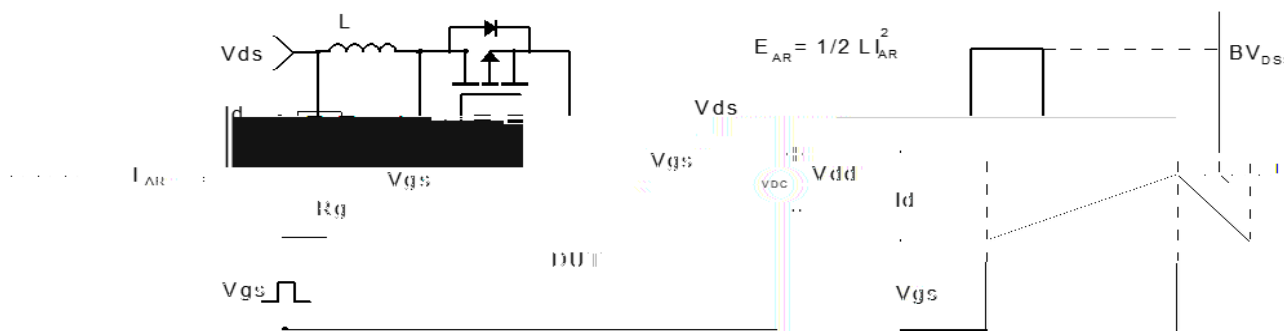


Figure 3: Unclamped Inductive Switching Test Circuit & Waveform

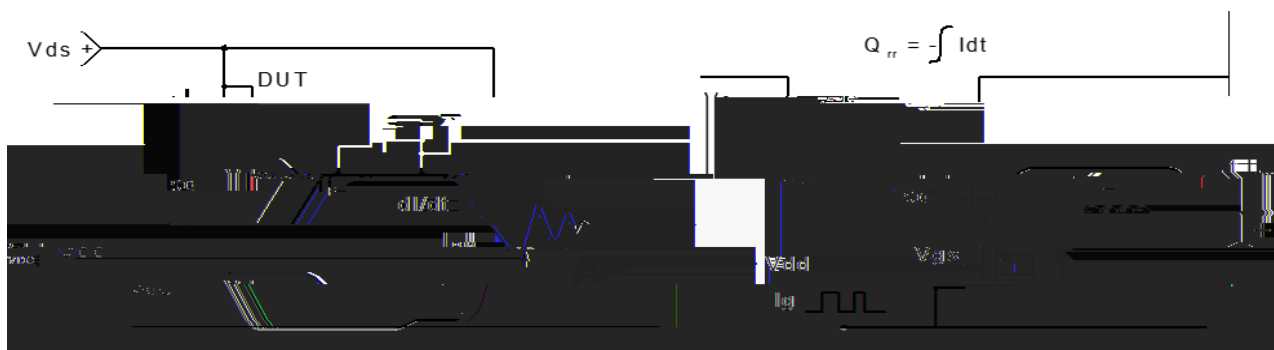


Figure 4: Diode Recovery Test Circuit & Waveform



