



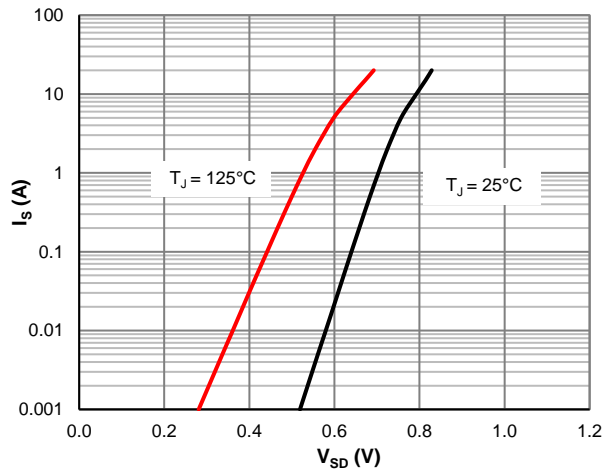
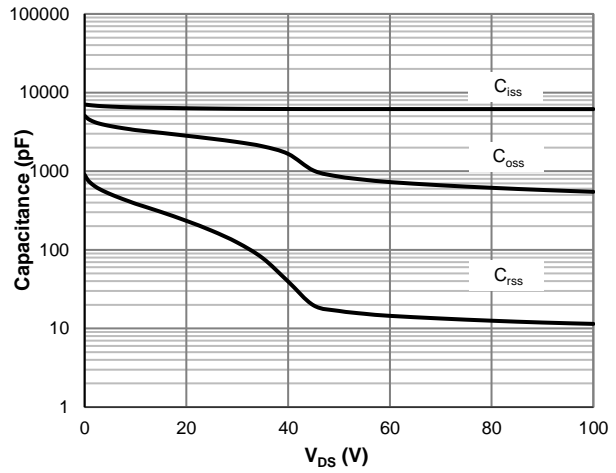
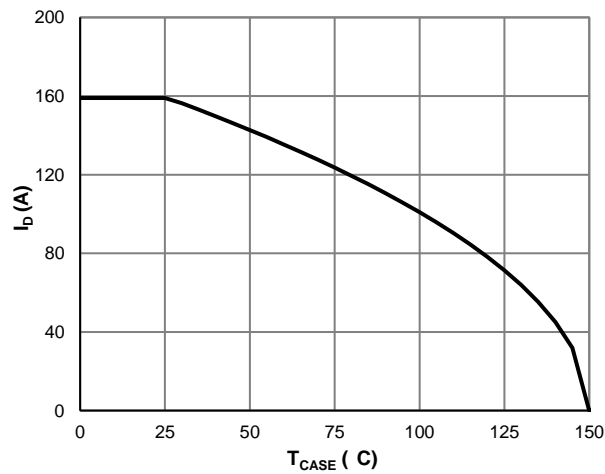
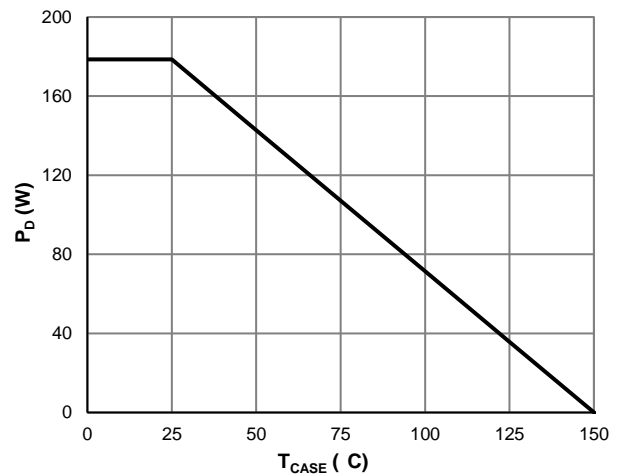
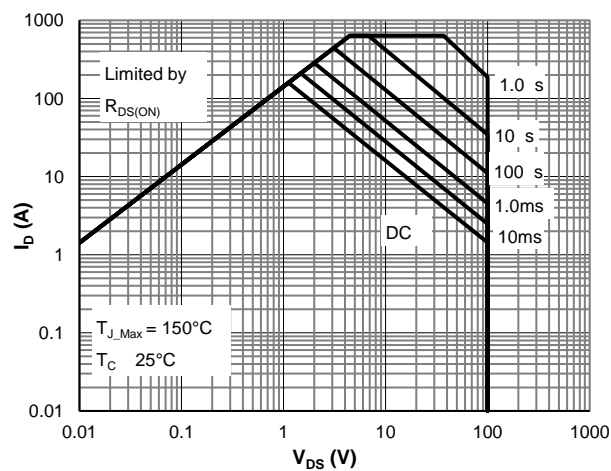
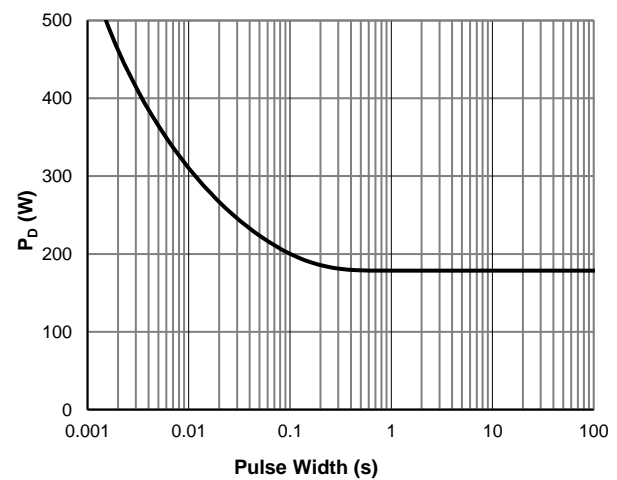
Product Summary

	Value	Unit
	100	V
	3.0	V
	159	A
	3.1	m

Package	# of Pins	Marking	MSL	T _j (°C)	Media	Quantity (pcs)
PDFN5x6-8L	8					

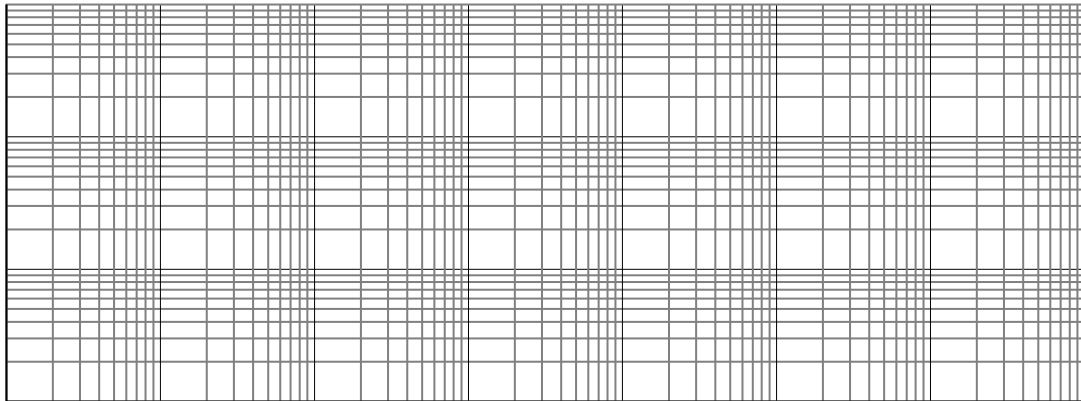


Typical Electrical & Thermal Characteristics


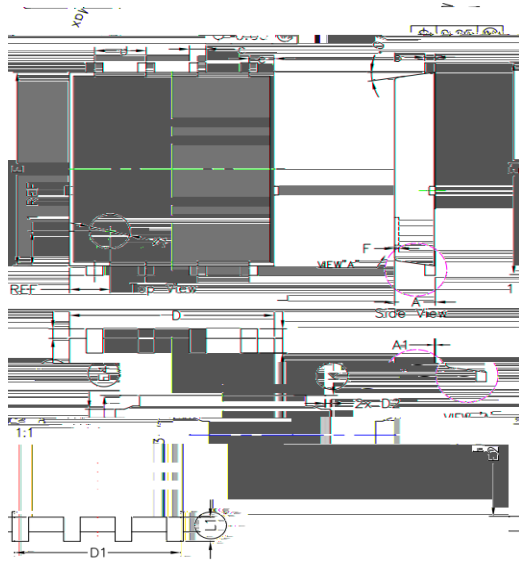
Typical Electrical & Thermal Characteristics

Figure 7: Body-Diode Characteristics

Figure 8: Capacitance Characteristics

Figure 9: Current De-rating

Figure 10: Power De-rating

Figure 11: Maximum Safe Operating Area

Figure 12: Single Pulse Power Rating, Junction-to-Case



Typical Electrical & Thermal Characteristics



PDFN5x6-8L Package Information



Recommended Solder Paste

