



DESCRIPTION:



ABSOLUTE MAXIMUM RATINGS


NOTE1: $i_{i1} \cdot \% \mu o \cdot U_{i1}, l$ ($\text{OE} < \mu v \zeta$)
NOTE2 $(\text{OE } i u] v \mu \check{s} U Z X, X A \check{d} i \cdot \check{d} i 9$

ELECTRICAL CHARACTERISTICS

	$K \mu \check{s} \% \mu \check{s}$						




ORDERING INFORMATION

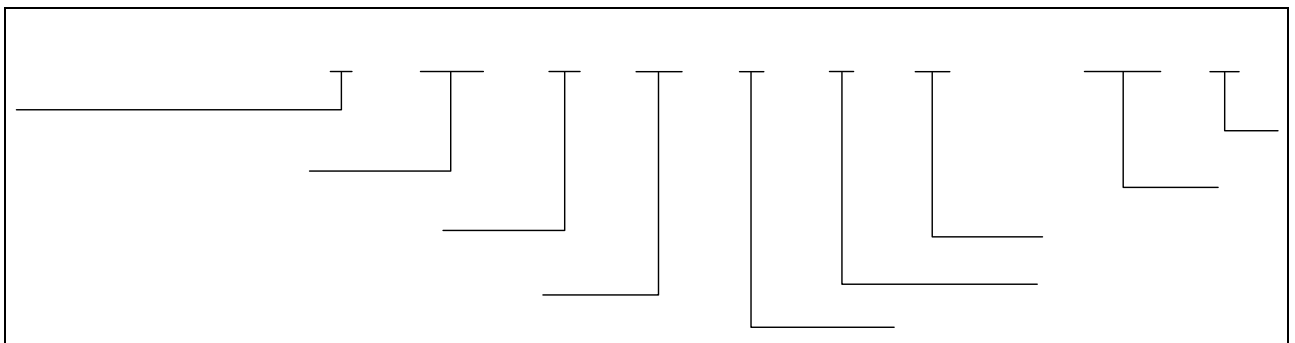

Packing Quantity	
Option	Quantity
/W	5ì hv]š•ldμ
^D	íîìì hv]š•lZ o



MARKING

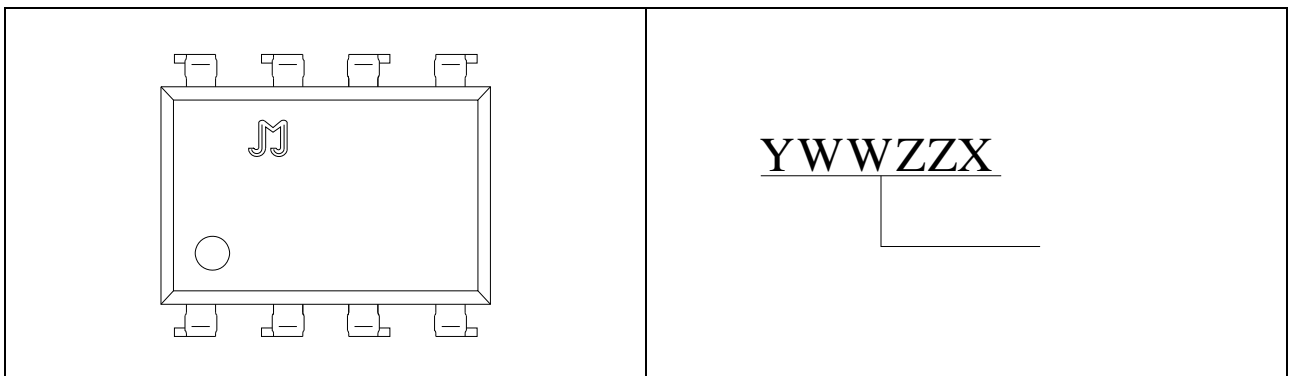




Characteristics Curves



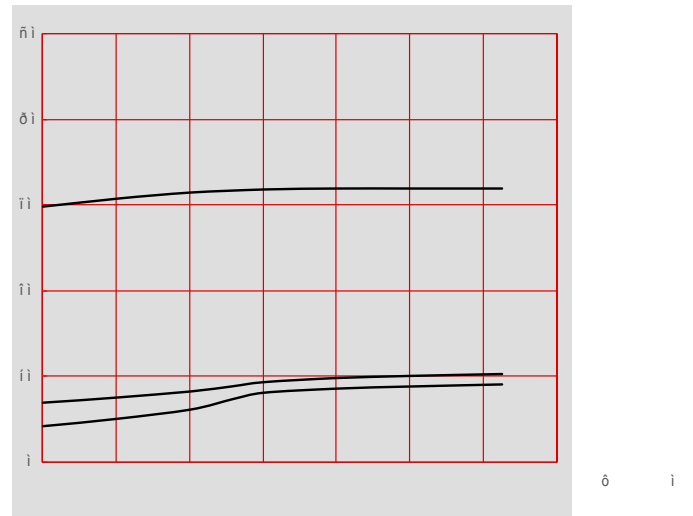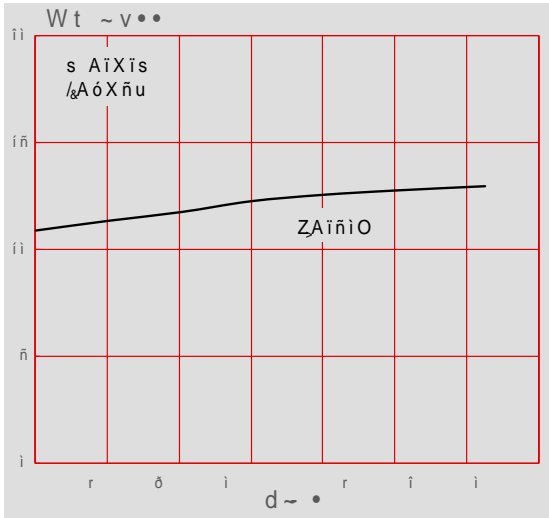



TEST CIRCUITS





RECOMMENDED SOLDER MASK (Dimensions in mm unless otherwise stated)





REFLOW INFORMATION

