



m
#




ORDERING INFORMATION

J	OC	M	B	3	5	C	k	-D8P/S	/
JieJie Microelectronics Co., Ltd.	Opto Coupler	MOS	B:2NO	3:V _O :60V	5:I _O :0.18A	C:I _{FT} 3mA	High speed	P:DIP8 S:SMD8	S:T3 L:T4

Packing Quantity	
Option	Quantity

MARKING




YWWZZX
LOT NO.



Characteristics Curves

LED Dropout Voltage vs. Ambient
Temperature

Output Current vs. Output Voltage

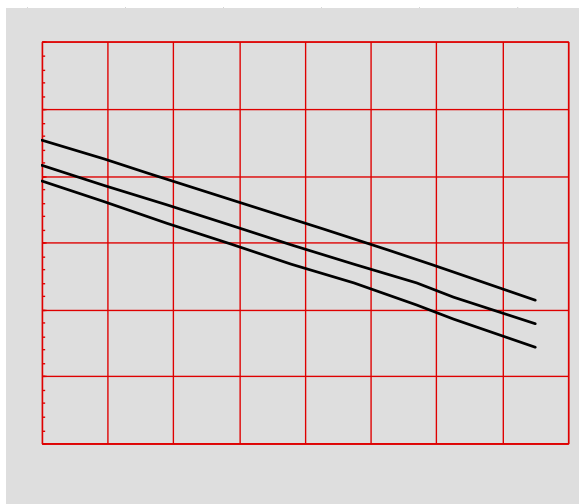




Turn On Time vs. Ambient Temperature

Turn Off Time vs. Ambient
Temperature





Package Dimension (Unit: mm)






REFLOW INFORMATION

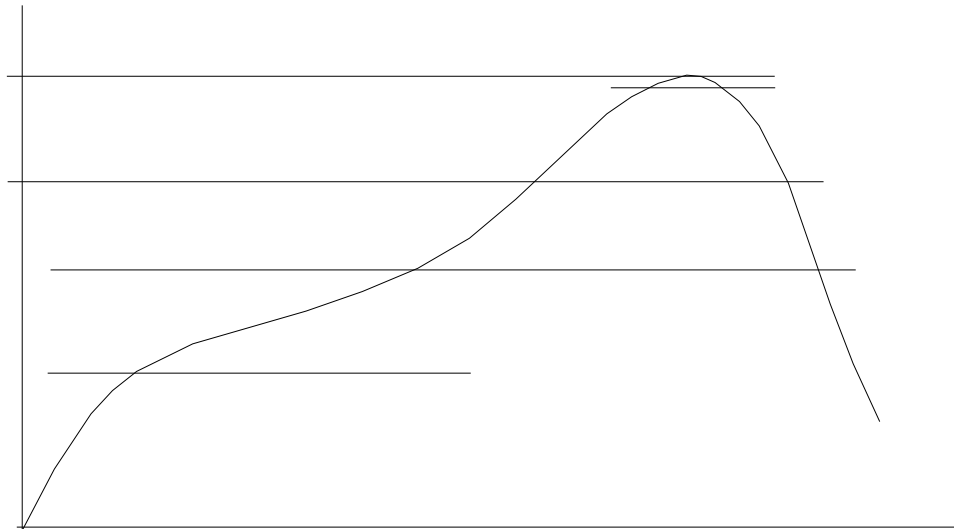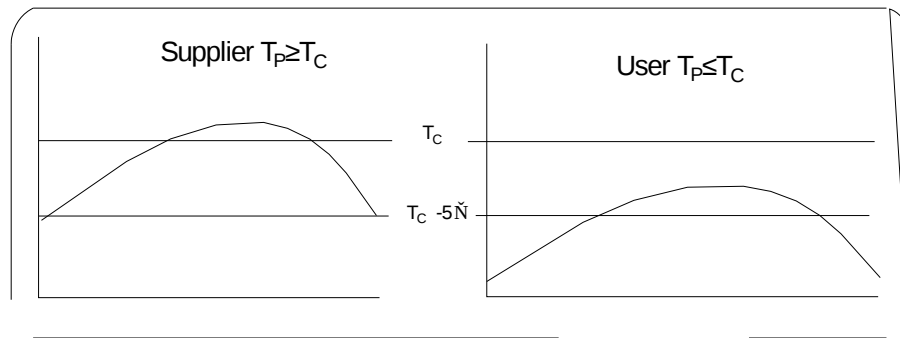



WAVE SOLDERING

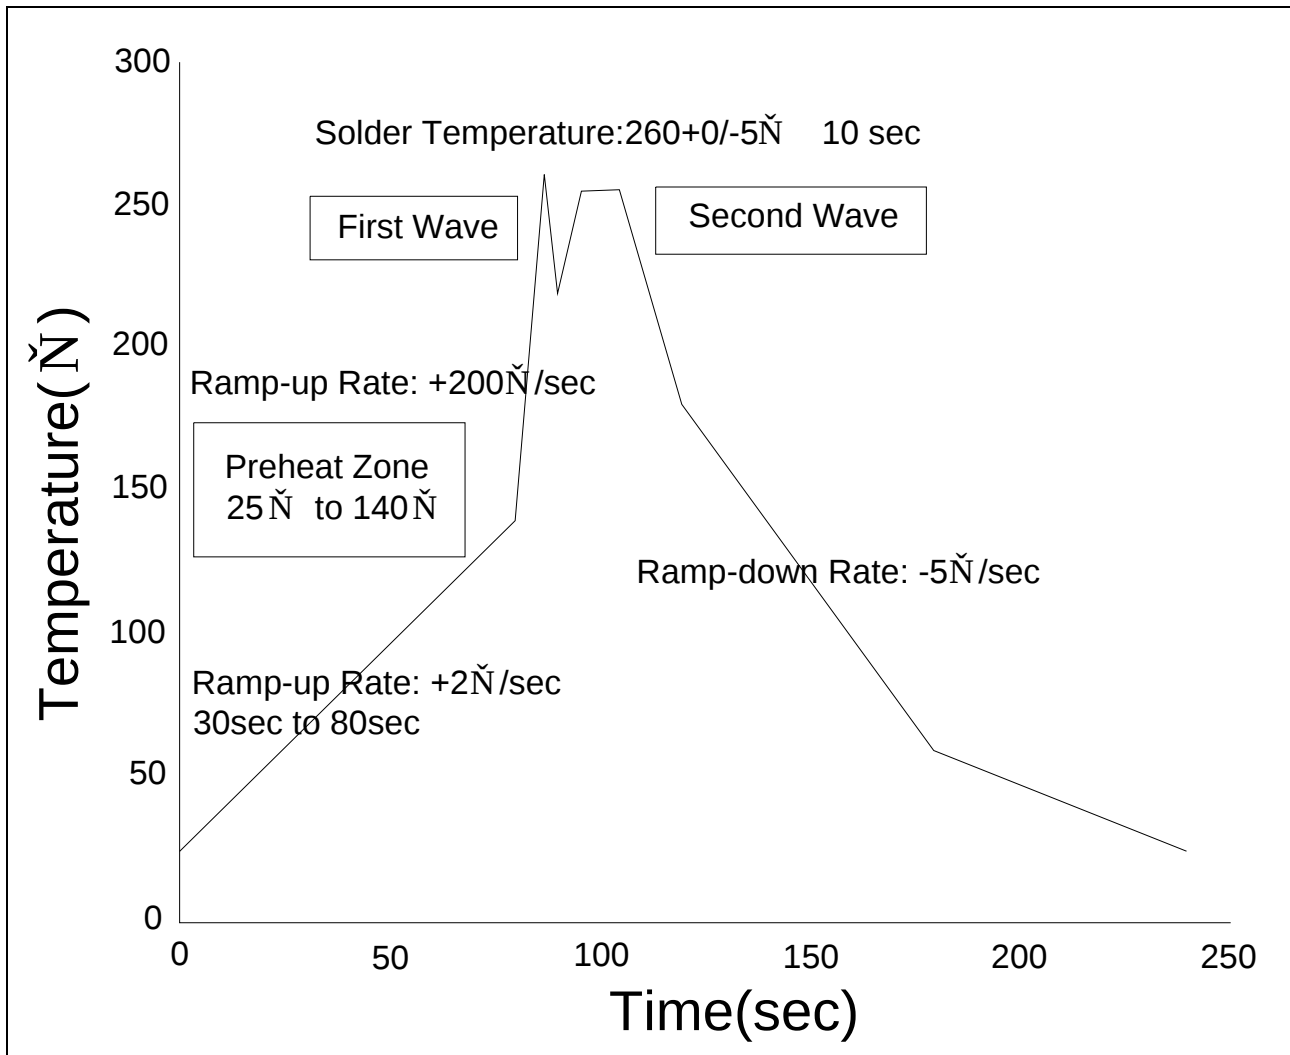

HAND SOLDERING BY SOLDERING IRON

Soldering Temperature	360 ± 5 °C
Soldering Time	3s max.

