



- $V_{CE} = 650V$
- $I_C = 20A @ V_{CE} = 100V$
- $V_{CE(sat)} = 1.6V$

TO-220F



- High ruggedness performance.
- 10 $\mu s$  short circuit capability.
- Positive  $V_{CE(sat)}$  temperature coefficient.
- High efficiency for motor control.
- Excellent current sharing in parallel operation.
- RoHS compliant.

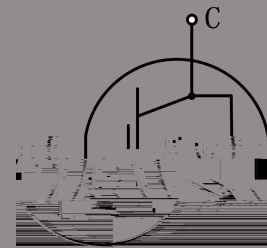

● E

- Home appliances
- Motor drives
- General inverter

| Type       | Marking | Package | Packaging method |
|------------|---------|---------|------------------|
| JJT20N65SS | T2065SS | TO-220F | Tube             |



(  $v_j=25$  unless otherwise specified)

### Static characteristics

| CES     | Collector-emitter breakdown voltage  | $V_{GE}=0V, I_C=250\mu A$      | 650 | -   | -    | V       |
|---------|--------------------------------------|--------------------------------|-----|-----|------|---------|
| CES     | Collector-emitter leakage current    | $V_{CE}=-650V, V_{GE}=0V$      | -   | -   | 50   | $\mu A$ |
| GES     | Gate leakage current, forward        | $V_{GE}=20V, V_{CE}=0V$        | -   | -   | 100  | nA      |
|         | Gate leakage current, reverse        | $V_{GE}=-20V, V_{CE}=0V$       | -   | -   | -100 | nA      |
| GE(th)  | Gate-emitter threshold voltage       | $V_{GE}=V_{CE}, I_C=1mA$       | 5.2 | 5.7 | 6.2  | V       |
| CE(sat) | Collector-emitter saturation voltage | $V_{GE}=15V, I_C=20A$          | -   | 1.6 | -    | V       |
|         |                                      | $V_{GE}=15V, I_C=20A, v_j=175$ | -   | 2.0 | -    | V       |


### Dynamic characteristics

| ies | Input capacitance            | $V_{CE}=30V$<br>$V_{GE}=0V$<br>$f=1MHz$    | - | 1700 | - | pF |
|-----|------------------------------|--|---|------|---|----|
| oes | Output capacitance           |  | - | 72   | - | pF |
| res | Reverse transfer capacitance |  | - | 13   | - | pF |
| g   | Total gate charge            | $V_{CC}=520V$<br>$V_{GE}=15V$<br>$I_C=20A$ | - | 71   | - | nC |



(  $v_j=25$  unless otherwise specified)

| F         | Diode forward voltage               | $I_F=20A$   | - | 1.6  | - | V  |
|-----------|-------------------------------------|---|---|------|---|----|
|           |                                     | $I_F=20A, v_j=175$  | - | 1.2  | - | V  |
| $t_{rr}$  | Diode reverse recovery time         | $V_R=400V$<br>$I_F=20A$<br>$d I_F/d t = -500A/\mu s$              | - | 62   | - | ns |
| $I_{rrm}$ | Diode peak reverse recovery current |   | - | 12   | - | A  |
| $Q_{rr}$  | Diode reverse recovery charge       |   | - | 472  | - | nC |
| $t_{rr}$  | Diode reverse recovery time         | $V_R=400V$<br>$I_F=20A$<br>$d I_F/d t = -500A/\mu s$<br>$v_j=175$ | - | 90   | - | ns |
| $I_{rrm}$ | Diode peak reverse recovery current |   | - | 19   | - | A  |
| $Q_{rr}$  | Diode reverse recovery charge       |   | - | 1130 | - | nC |

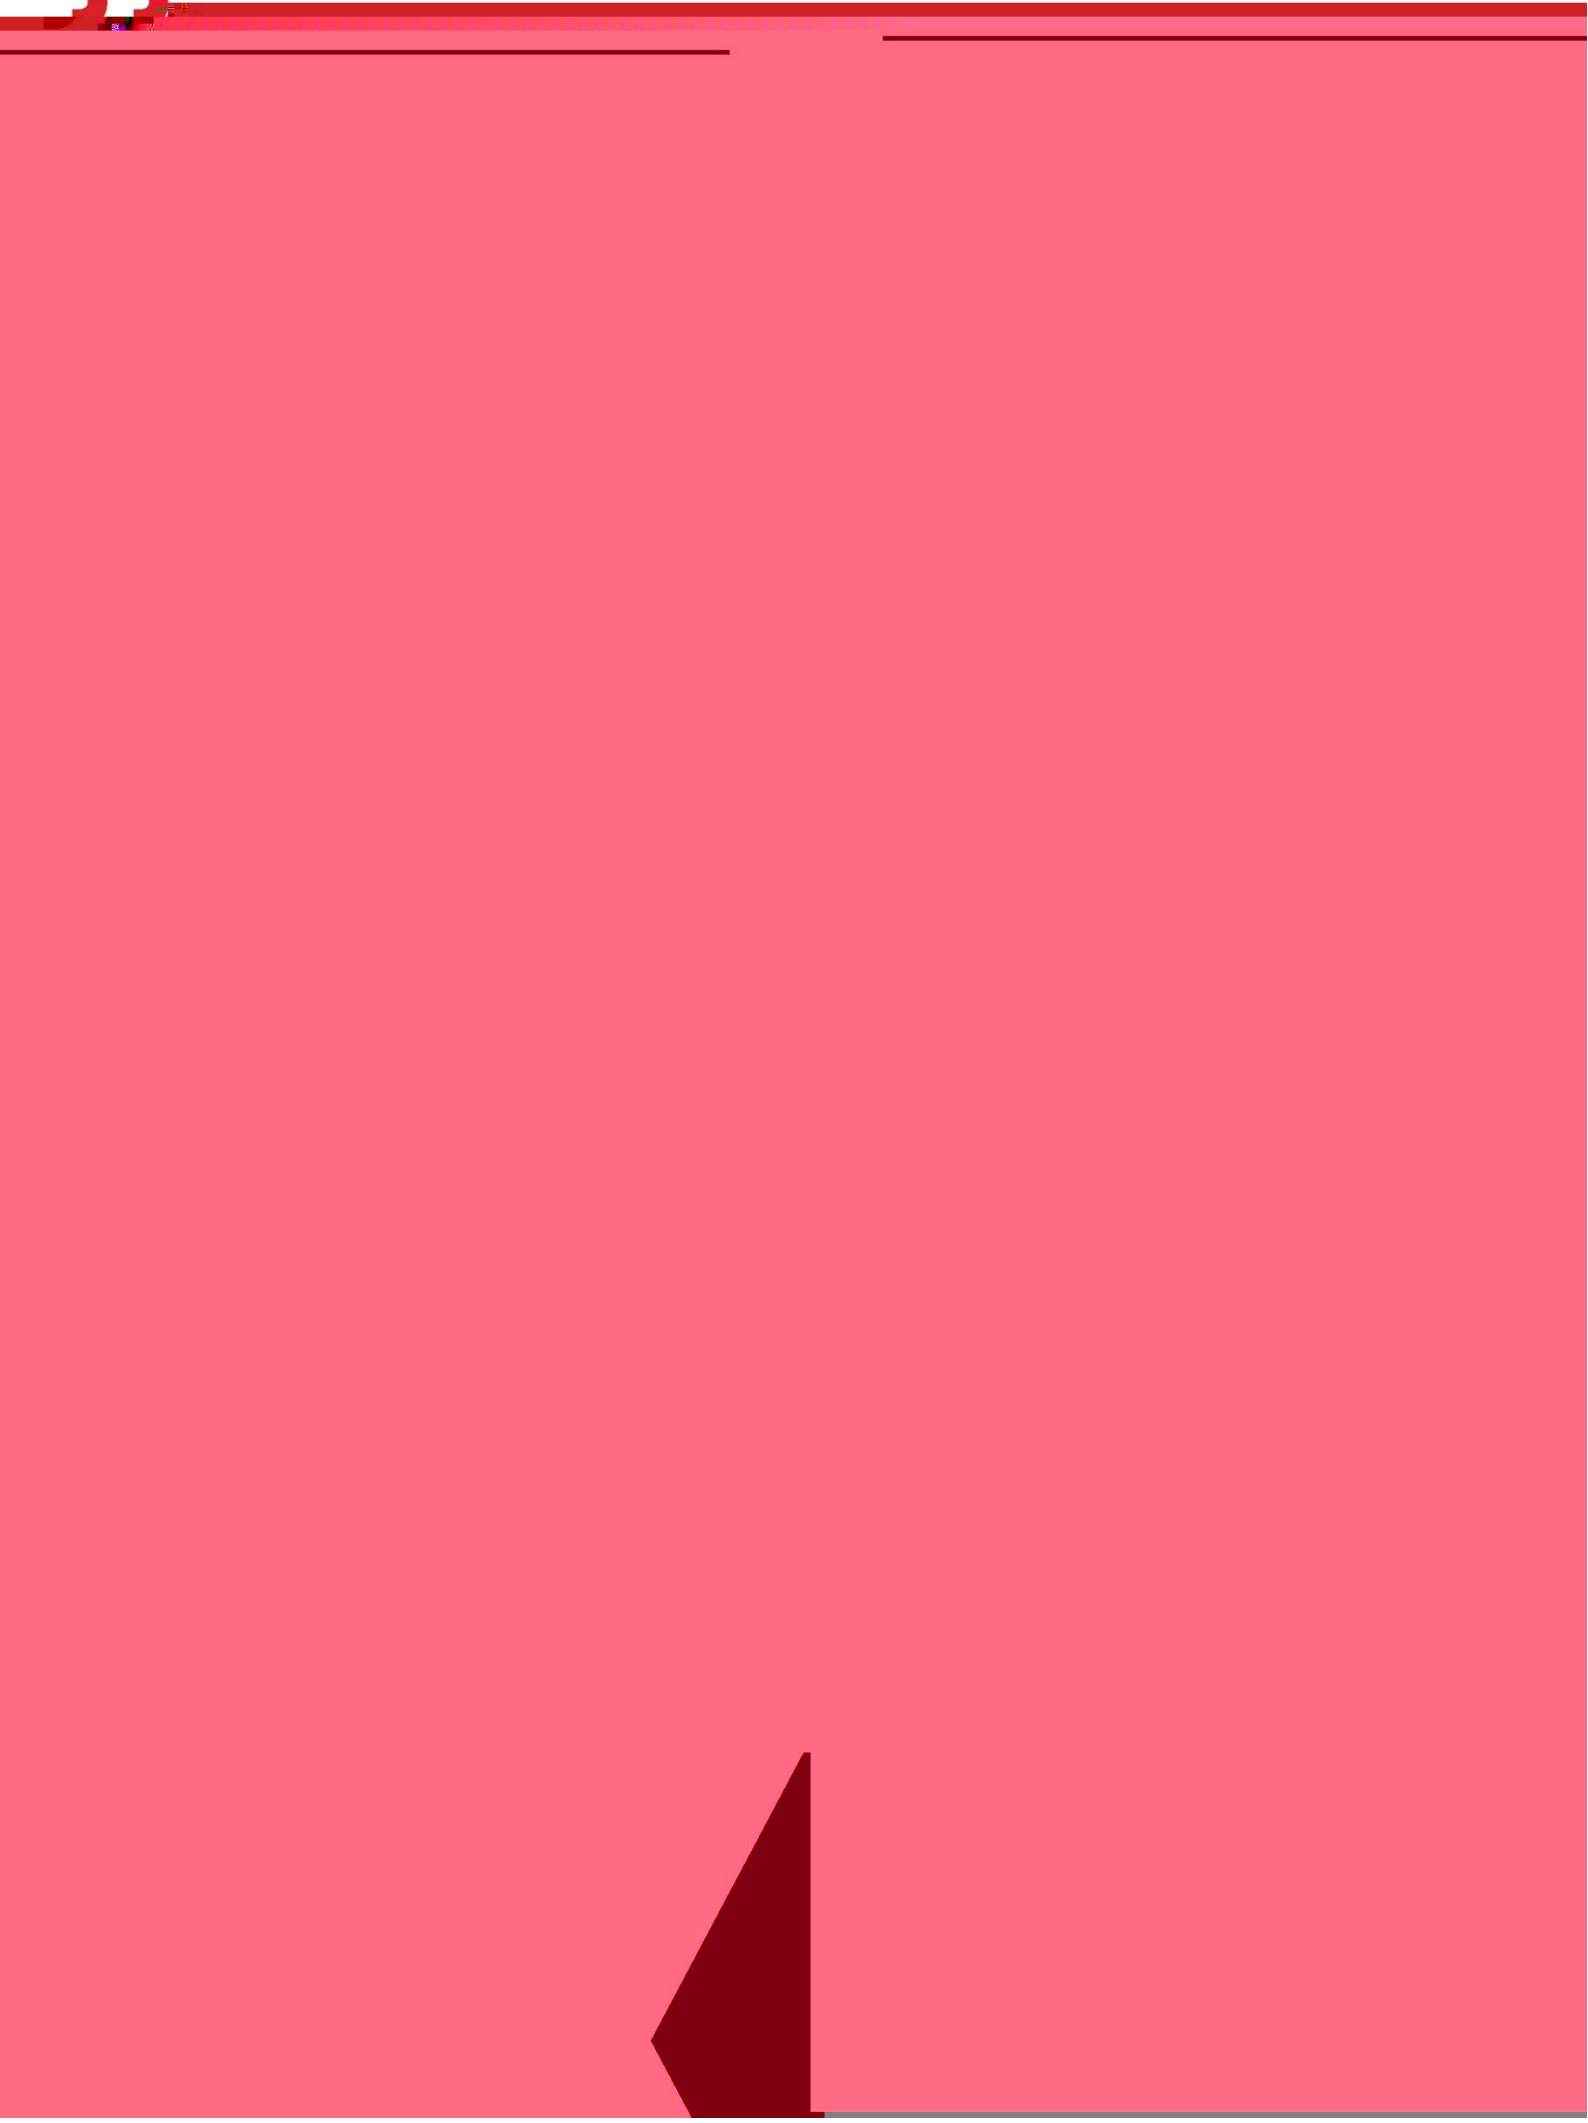

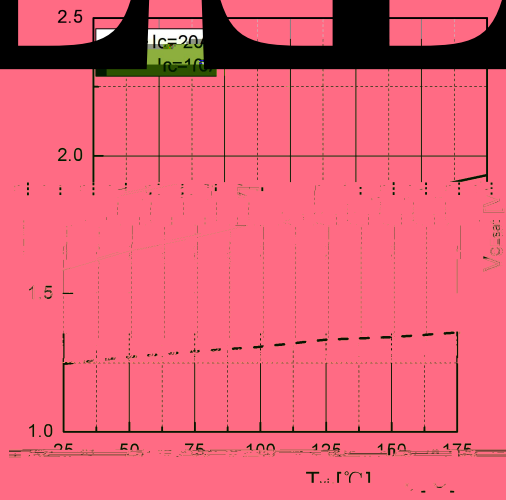
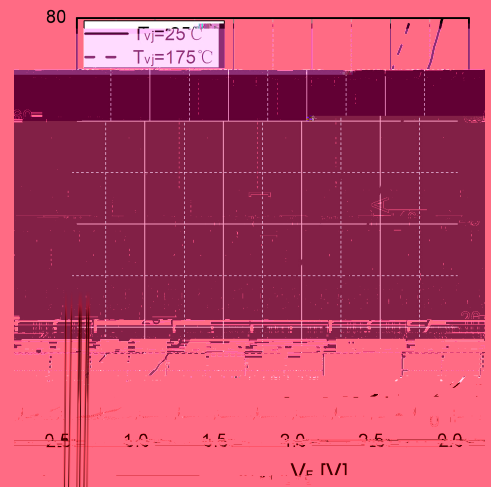


Fig 7. Typ 1




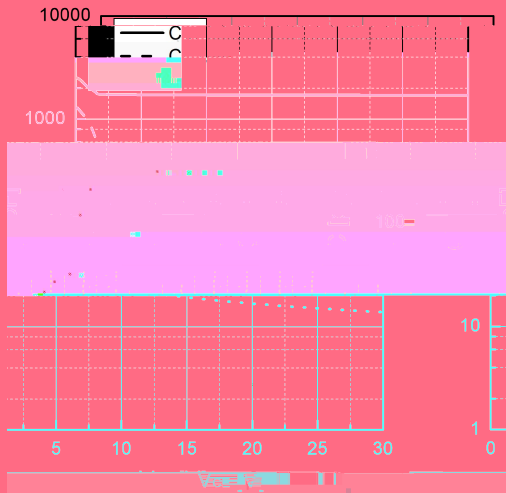


Fig 13. Typical capacitance as a function of  $C_E$   
 ( $f=1\text{Mhz}$ ,  $V_{GE}=0\text{V}$ )



TO-220F

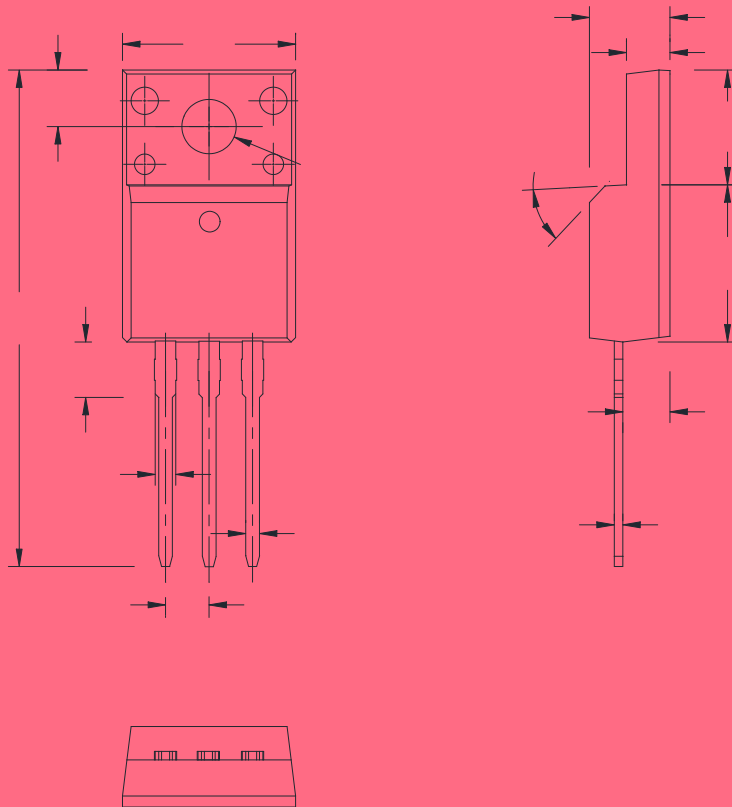

| Ref. | Dimensions  |      |       |        |       |       |
|------|-------------|------|-------|--------|-------|-------|
|      | Millimeters |      |       | Inches |       |       |
|      | Min.        | Typ. | Max.  | Min.   | Typ.  | Max.  |
| A    | 4.50        | -    | 4.90  | 0.177  | -     | 0.193 |
| B    | 0.74        | 0.80 | 0.83  | 0.029  | 0.031 | 0.033 |
| C    | 0.47        | -    | 0.66  | 0.019  | -     | 0.026 |
| C2   | 2.45        | -    | 2.75  | 0.096  | -     | 0.108 |
| C3   | 2.60        | -    | 3.00  | 0.102  | -     | 0.118 |
| D    | 8.80        | -    | 9.30  | 0.346  | -     | 0.366 |
| E    | 9.80        | -    | 10.40 | 0.386  | -     | 0.410 |
| F    | 6.40        | -    | 6.80  | 0.252  | -     | 0.268 |
| G    | 2.40        | -    | 2.70  | 0.094  | -     | 0.106 |
| H    | 28.0        | -    | 29.80 | 1.102  | -     | 1.173 |
| L1   | -           | 3.63 | -     | -      | 0.143 | -     |
| L2   | 1.14        | -    | 1.70  | 0.045  | -     | 0.067 |
| L3   | -           | 3.30 | -     | -      | 0.130 | -     |
| V1   | -           | 45   | -     | -      | 45    | -     |



| Date       | Revision | Changes                   |
|------------|----------|---------------------------|
| 2023-12-05 | Rev 1.0  | Release of the datasheet. |
| 2024-05-20 | Rev 1.1  | Update                    |
| 2025-03-06 | Rev 1.2  | Character update          |

PLEASE NOTE - Jiangsu JieJie Microelectronics Co., Ltd ("JJM") reserves the right to amend, correct, modify and enhance the product and/or this document at any time without prior notice. If you intend to purchase this product, please obtain the latest data sheet.

