





T_{js}	V_p	45	V
----------	-------	----	---

ELECTRICAL CHARACTERISTICS

Symbol	Test Condition	Quadrant	Value		Unit
I_G	$V_D = 0V, R_L = 3\Omega$	- -	0	0	A
V_G		- -	0	1	V
V_D	$V_D = 5V, T_j = 25^\circ C, R_L = 3k\Omega$	- -	0	0	V
I_L	$I_G = 2I_G$	-	0	2	A
			0	3	A
I_H	$I_T = 0$		0	5	A
$\frac{dV}{dt}$	$V_D = 0V, T_j = 25^\circ C$		0	0	V/ μs
$\frac{dI}{dt}$	$10V/\mu s, T_j = 25^\circ C$		0	3	A
t_0	$I_G = 0A, I_A = 0A, I_R = 0A$		0	2	μs
t_b	$T_j = 25^\circ C$		0	2	
V_C	$I_C = 0A, p = 0$		0	5	V


ORDERING INFORMATION ie1-3

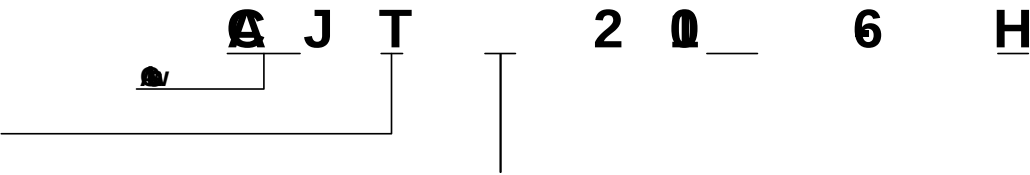

ORDERING INFORMATION

Order code	Voltage $V_{\text{DRM}}/V_{\text{RRM}}$ (V)	IGT(mA)	Package	Base qty. (pcs)	Delivery mode
ACJT210-6H	600	10	TO-251	80	Tube

PACKAGE MECHANICAL DATA



文件编号

日期

编制/审核

批准/发布

本文件为机密文件，未经授权，不得复制或传播。如有违反，将依法追究法律责任。