




ACJT405-10C 4A TRIAC

Rev.A.1.1

DESCRIPTION:

The ACJT405-10C triac is suitable for general purpose AC switching. It can be used as an ON/OFF function in applications such as heating regulation, induction motor starting circuits, for phase control operation in light dimmers, motor speed controllers. The ACJT405-10C embeds a TVS structure to absorb the inductive turn-off energy such as those described in the IEC 61000-4-5 standards. Package TO-220C is RoHS compliant.



MAIN FEATURES

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit
Storage junction temperature range	T_{stg}	-40-150	
Operating junction temperature range	T_j	-40-125	
Repetitive peak off-state voltage ($T_j=25^\circ\text{C}$)	V_{DRM}	1000	V
Repetitive peak reverse voltage ($T_j=25^\circ\text{C}$)	V_{RRM}	1000	V

Peak pulse voltage 25 ; non-repetitive, off-state; FIG.7)	V_{pp}	3	kV
--	----------	---	----

Electrical Characteristics (T_j=25 unless otherwise specified)


Symbol	Test Condition	Quadrant	Value		Unit
I _{GT}	V _D =12V R _L =33	- -	MAX.	5	mA
V _{GT}		- -	MAX.	1	V
V _{GD}	V _D =V _{DRM} T _j =125 R _L =3.3k	- -	MIN.	0.2	V
I _G	I _G =1.2I _{GT}	-	MAX.	15	mA
				20	

MAX.
20
mA

FIG.1:

FIG.7 Test circuit for inductive loads to IEC

610004- 5 standards

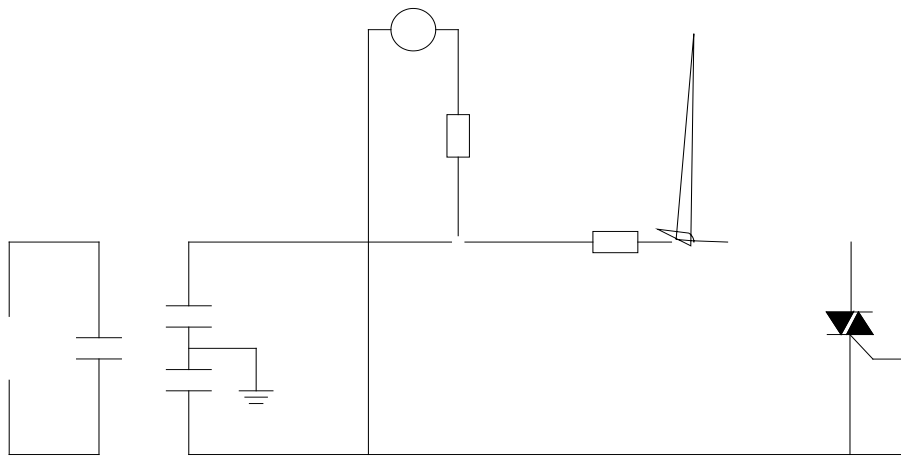

PACKAGE MECHANICAL DATA



