




ACJT610-8C 6A TRIAC

Rev.A.1.1

The ACJT610-8C triac is suitable for general purpose AC switching. It can be used as an ON/OFF function in applications such as heating regulation, induction motor starting circuits, for phase control operation in light dimmers, motor speed controllers. The ACJT610-8C embeds a TVS structure to absorb the inductive turn-off energy such as those described in the IEC 61000-4-5 standards. Package TO-220C is RoHS compliant.



| Parameter | Symbol | Value | Unit |
|--------------------------------------|-----------|---------|------|
| Storage junction temperature range | T_{stg} | -40-150 | |
| Operating junction temperature range | T_j | -40-125 | |

| | | | |
|--|----------|-----|----|
| Peak pulse voltage ($T_j=25$; non-repetitive, off-state; FIG.7) | V_{pp} | 3.5 | kV |
|--|----------|-----|----|

(T_j=25 unless otherwise specified)

| Symbol | Test Condition | Quadrant | Value | | Unit |
|----------------------|--|----------|-------|-----|------------|
| I_{GT} | $V_D=12V R_L=33$ | - - | MAX. | 10 | mA |
| V_{GT} | | - - | MAX. | 1 | V |
| V_{GD} | $V_D=V_{DRM} T_j=125$ $R_L=3.3k$ | - - | MIN. | 0.2 | V |
| I_L | $I_G=1.2I_{GT}$ | - | MAX. | 20 | mA |
| | | | | 35 | |
| I_H | $I_T=100mA$ | | MAX. | 20 | mA |
| dV/dt | $V_D=540V$ Gate Open $T_j=125$ | | MIN. | 500 | V/ μs |
| (dI/dt) _c | (dV/dt) _c =10V/ μs , $T_j=125$ | | MIN. | 3 | A/ms |
| t_{on} | $I_G=20mA I_A=200mA I_R=20mA$ $T_j=25$ | | TYP. | 2.5 | μs |
| t_{off} | | | | 25 | |
| V_{CL} | $I_{CL}=0.1mA t_p=1ms$ | | MIN. | 850 | V |

| Symbol | Parameter | | Value(MAX.) | Unit |
|-----------|----------------------------|-----------|-------------|---------|
| V_{TM} | $I_{TM}=8.5A t_p=380\mu s$ | $T_j=25$ | 1.5 | V |
| V_{TO} | Threshold voltage | $T_j=125$ | 0.82 | V |
| R_D | Dynamic resistance | $T_j=125$ | 64 | m |
| I_{DRM} | $V_D=V_{DRM} V_R=V_{RRM}$ | $T_j=25$ | 5 | μA |
| I_{RRM} | | $T_j=125$ | 0.3 | mA |

| Symbol | Parameter | Value | Unit |
|---------------|--------------------------|-------|------------|
| $R_{th(j-c)}$ | junction to case (AC) | 1.7 | W |
| $R_{th(j-a)}$ | junction to ambient (AC) | 60 | W |

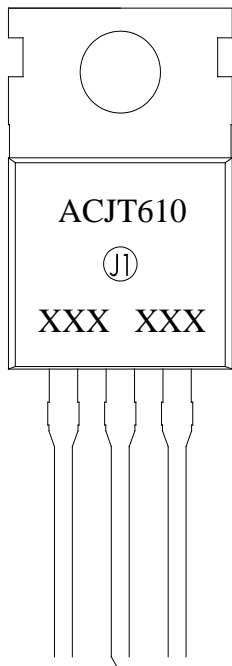
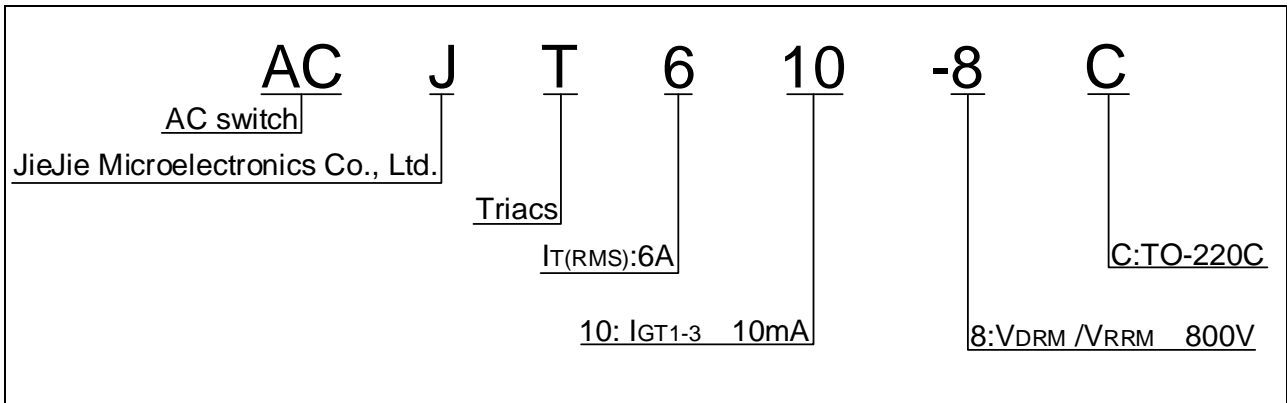


FIG.1: Maximum power dissipation versus RMS on-state current


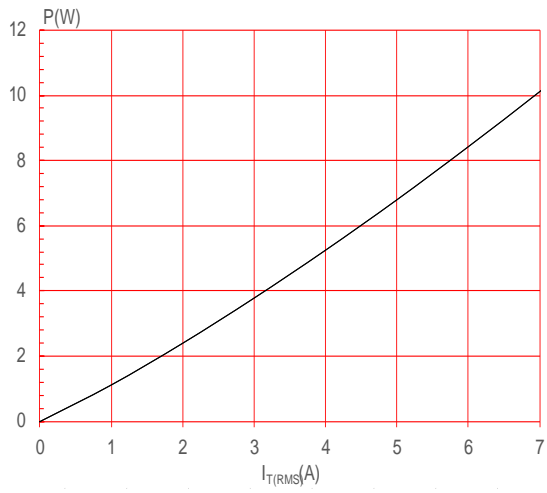


FIG.2: RMS on-state current versus case temperature



FIG.7 Test circuit for inductive and resistive loads to IEC-61000-4-5 standards

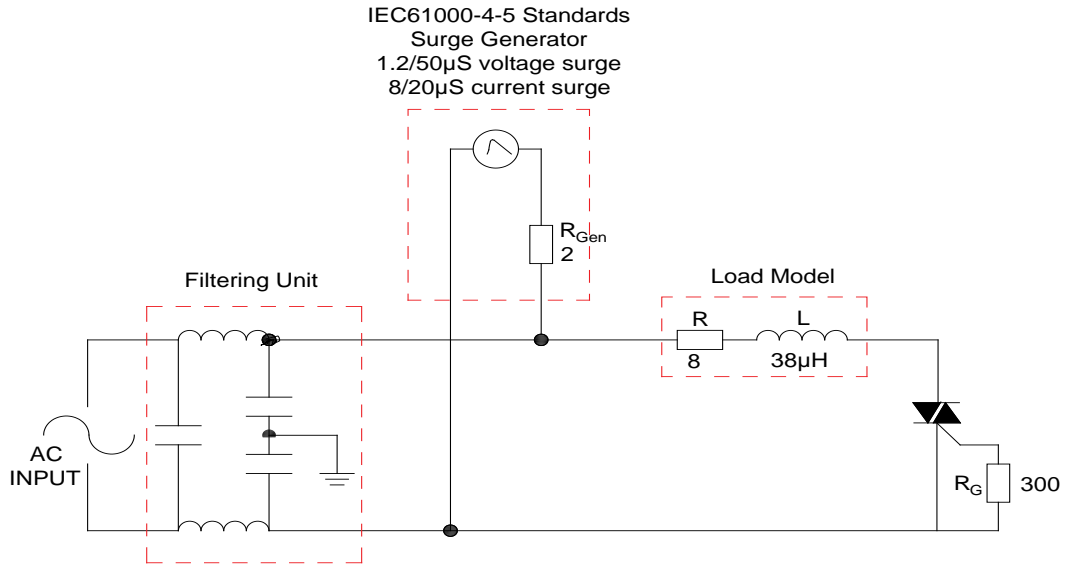


| Order code | Voltage V_{DRM}/V_{RRM} (V) | IGT(mA) | Package | Base qty. (pcs) | Delivery mode |
|------------|----------------------------------|---------|---------|--------------------|---------------|
|------------|----------------------------------|---------|---------|--------------------|---------------|



Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co., Ltd. assumes no responsibility for the consequences of use without consideration for such information nor use beyond it. Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement.

Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information. This document supersedes and replaces all information previously supplied.

 is a registered trademark of Jiangsu JieJie Microelectronics Co., Ltd.
Copyright © 2025 Jiangsu JieJie Microelectronics Co., Ltd. All rights reserved.