





ORDERING INFORMATION

|                    |                         |           |                                  |                            |                |
|--------------------|-------------------------|-----------|----------------------------------|----------------------------|----------------|
| <b>T</b>           | <b>20</b>               | <b>50</b> | <b>H</b>                         | <b>-8</b>                  | <b>A</b>       |
| Triacs             |                         |           |                                  |                            | A:TO-220A(Ins) |
| <u>IT(RMS):20A</u> |                         |           |                                  |                            |                |
|                    | <u>50:IGT1-3 050 mA</u> |           |                                  | <u>8:VDRM /VRRM 1800 V</u> |                |
|                    |                         |           | <u>High junction temperature</u> |                            |                |

MARKING

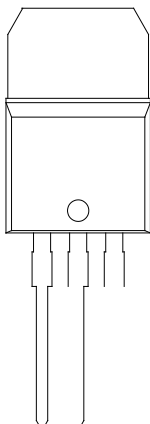


FIG.1: Maximum power dissipation versus RMS  
on-state current

FIG.2: RMS on-state current versus case  
temperature

T2050H-8A





