



JST20E-1200CW 20A TRIAC

Rev.A.1.1

DESCRIPTION:

The JST20E-1200CW triac is suitable for general purpose AC switching. It can be used as an ON/OFF function in applications such as heating regulation, induction motor starting circuits, for phase control operation in light dimmers, motor speed controllers. JST20E-1200CW snubberless triac is especially recommended for use on inductive loads. Package TO-263 is RoHS compliant.

MAIN FEATURES

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit
Storage junction temperature range	T_{stg}	-40-150	
Operating junction temperature range	T_j	-40-125	
Repetitive peak off-state voltage ($T_j=25^\circ\text{C}$)	V_{DRM}	1200	V

Peak pulse voltage (Tj=25 ; non-repetitive, off-state; FIG.8)	Vpp	4	kV
--	-----	---	----

S.32 re f(>BDC /C2_1 1 Tf35 -0.002 T)7olesepetmbol0 Tw 3.61/S.32 re f(>BDC /C2 -0.09T
ELECTRICAL CHARACTERISTICS (Tj=25 unless otherwi753.48 0.00pec0.00ified)

Smbol

ORDERING INFORMATION

<u>J</u>	<u>ST</u>	<u>20</u>	<u>E</u>	<u>-1200</u>	<u>CW</u>	<u>-/</u>
JieJie Microelectronics Co., Ltd.	Triacs					Blank:Tube -TR:Tape & Reel
	<u>I_{T(RMS)}:20A</u>					
		<u>E:TO-263</u>			<u>CW:I_{GT1-3} ≤ 35mA</u>	
				<u>1200:V_{DRM} / V_{RRM} ≥ 1200V</u>		

MARKING

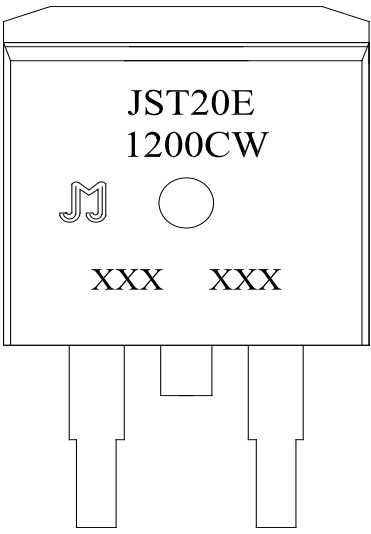
 JST20E 1200CW XXX XXX	XXX XXX Year Month Production Code
---	---

FIG.1: Maximum power dissipation versus RMS on-state current




FIG.2: RMS on-state current versus case temperature

FIG.7: Relative variations of gate trigger current, holding current and latching current versus junction temperature

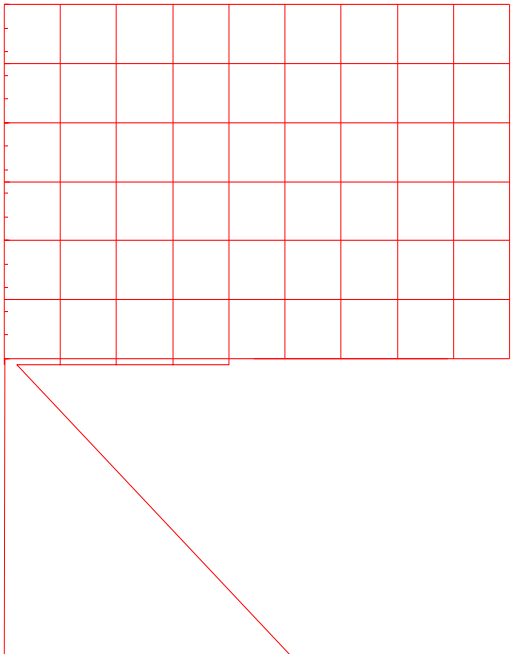


FIG.8: Test circuit for inductive and resistive loads to IEC-61000-4-5 standards


ORDERING INFORMATION

Order code	Voltage $V_{\text{DRM}}/V_{\text{RRM}}$ (V)	IGT(mA)	Package	Base qty. (pcs)	Delivery mode
		- -			
JST20E-1200CW	1200	35	TO-263	50	Tube
JST20E-1200CW-TR				800	Tape & Reel

Document Revision History

Date	Revision	Changes
Apr.12, 2023	A.1.0	Last updated
Oct.20, 2025	A.1.1	Revise PACKAGE MECHANICAL DATA

PACKAGE MECHANICAL DATA



Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	9.90		10.20	0.390		0.402
B	14.70		15.80	0.579		0.622
C	9.40		9.60	0.370		0.378
D	2.40			0.094		
E	1.20		1.50	0.047		0.059
F	0.75		0.85	0.029		0.033

DELIVERY MODE

]

