



JST30E-800CW 30A TRIAC

Rev.A.1.1

The JST30E-800CW triac is suitable for general purpose AC switching. It can be used as an ON/OFF function in applications such as heating regulation, induction motor starting circuits, for phase control operation in li8.7(o)10 (per)75i()10 (f)2 (unc)4 (t)7.19999 ION2 (()

Peak pulse voltage (Tj=25 ; non-repetitive,off-state;FIG.8)	Vpp	2.5	kV /Pag
--	-----	-----	---------

(Tj=25 unless otherwise specified)

Symbol	Test Condi /Pagti	Qdrant	Value	Uni
IGT	Vi=12V RL=33Ω			

JST30E-800CW


FIG.1: Maxi 79772 cLtd.

FIG.7: Relative variations of gate trigger current, holding current and latching current versus junction temperature



FIG.8: Test circuit for inductive and resistive loads to IEC-61000-4-5 standards



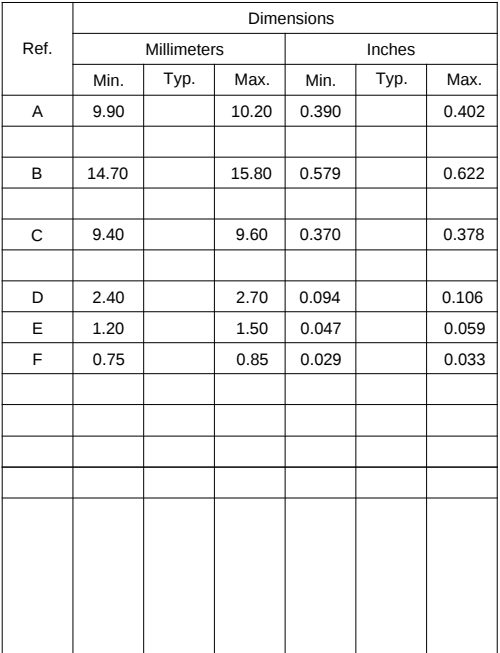

Information furnished in this document is believed to be accurate and reliable. However,
Jiangsu JieJie