


DESCRIPTION:

The ACJT08K-1000SW triac is suitable for general purpose AC switching. It can be used as an ON/OFF function in applications such as heating regulation, induction motor starting circuits, for phase control operation in light dimmers, motor speed controllers. The ACJT08K-1000SW embeds a TVS structure to absorb the inductive turn-off energy such as those described in the IEC 61000-4-5 standards. Package TO-252 is RoHS compliant.

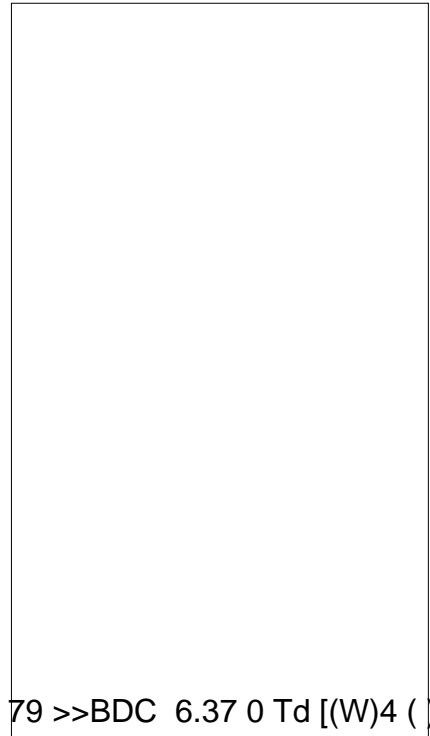

MAIN FEATURES


Symbol	Value	Unit
$I_{T(RMS)}$	8	A
V_{DRM}/V_{RRM}	1000	V

Peak gate current I_{GM} (T_j=125 °C) 4A

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit
Storage junction temperature range	T _{stg}	-40-150	
Operating junction temperature range	T _j	-40-125	
Repetitive peak off-state voltage (T _j =25 °C)	V _{DRM}	1000	V
Repetitive peak reverse voltage (T _j =25 °C)	V _{RRM}	1000	V
Continuous on-state current (T _c 0106 °C)	I _{T(RMS)}	8	A
Repetitive surge peak on-state current cycle, t _p =20ms, T _j =25 °C	I _{TSM}	80	A
Repetitive surge peak on-state current cycle, t _p =16.6ms, T _j =25 °C		88	
Value for fusing (t _p =10ms, T _j =25 °C)	I ² t	32	A ² s
Maximum rate of rise of on-state current (2× I _{GT} , f=100Hz, T _j =125 °C)	di/dt	100	A/s
Peak gate current (t _p =20 μs, T _j =125 °C)	I _{GM}	4	A
Average gate power dissipation (T _j =125 °C)	P _{G(AV)}	0.5	W
Peak gate power	P _{GM}	10	W

ORDERING INFORMATION

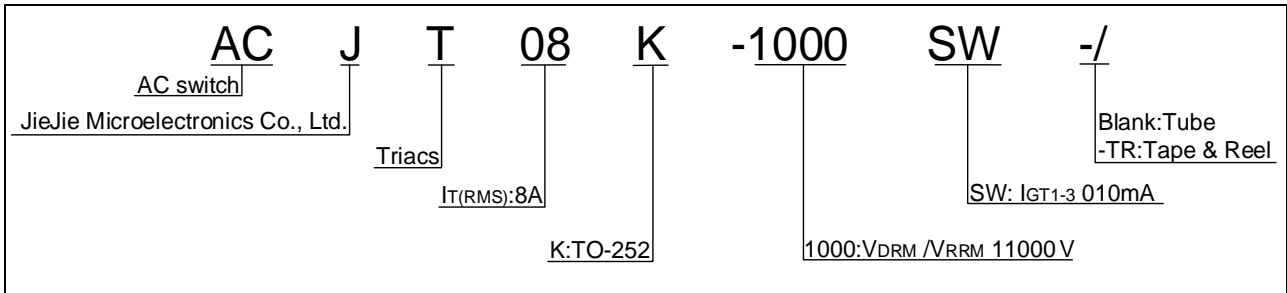

MARKING



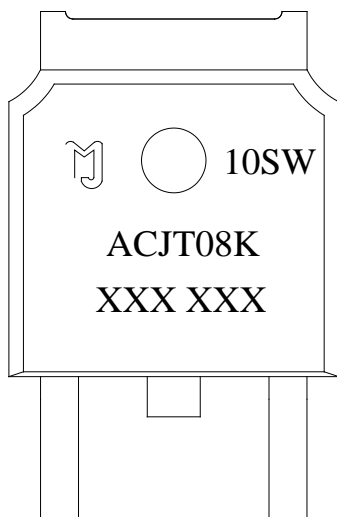



FIG.8 ÖTest circuit for inductive and resistive loads to IEC-61000-4-5 standards

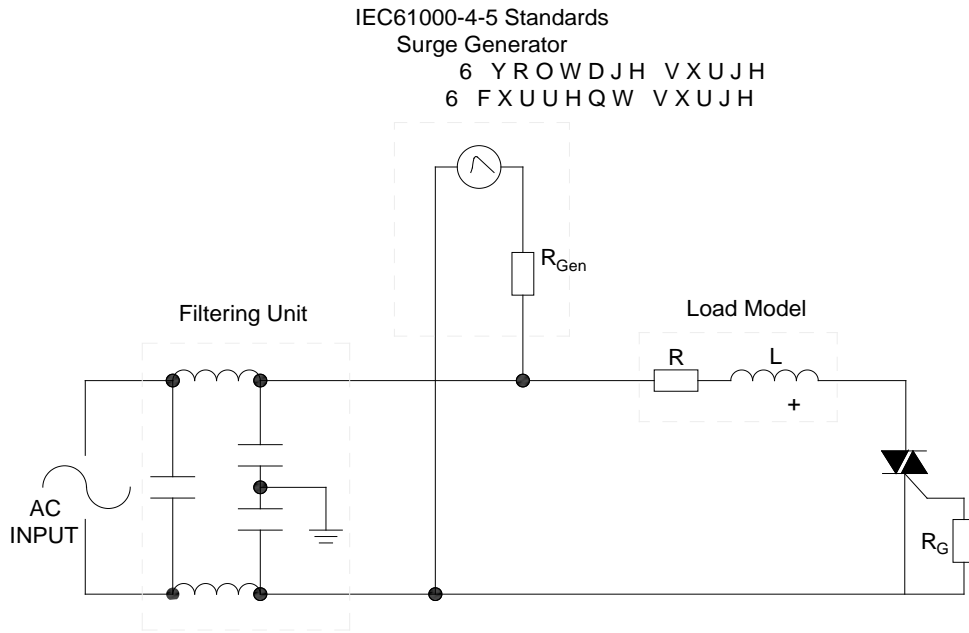



PACKAGE MECHANICAL DATA

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	2.10		2.50	0.083		0.098
A2	0		0.15	0		0.006
B	0.66		0.86	0.026		0.034
B2	5.18		5.48	0.202		0.216
C	0.40		0.60	0.016		0.024
C2	0.44		0.58	0.017		0.023
D	5.90		6.30	0.232		0.248
D1						
E	6.40		6.80	0.252		0.268
E1	4.63			0.182		
G	4.47		4.67	0.176		0.184
G1	2.18		2.38	0.086		0.094
L	1.09		1.21	0.043		0.048
L2	1.35		1.65	0.053		0.065



DELIVERY MODE

