JST06C-8 6 Tm.7 (622)3.2 (0)3.60 08 w36 m22 (8.)-Tw /TC4 1T67ox 0 Tc 0 Tw 108 0.7

Peak pulse voltage (T_j=25 ; non-repetitive,off-state;FIG.7)	V_{pp}	3	kV

(T_j=25 unless otherwise specified)

Symbol	Test Condition	Quadrant	Value		Unit
I_{GT}	V_D =12V R_L =33	- -	MAX.	35	mA
V_{GT}		- -	MAX.	1	V
V_{GD}	V_D =V_{DRM} T_j =125 R_L =3.3k	- -	MIN.	0.2	V
I_L	I_G =1.2I_{GT}	-	MAX.	50	mA
				60	
I_H	I_T =100mA		MAX.	35	mA
dV/dt	V_D=540V Gate Open T_j =125		MIN.	1200	V s
(dI/dt)c	j=125		MIN.	4	A/ms
t_{on}	I_G=40mA I_A=200mA I_R=20mA T_j=25		TYP.	3	s
t_{off}				30	

Symbol	Parameter		Value(MAX.)	Unit
V_{TM}	I_{TM} =8.5A t_p=380 s	T_j=25	1.5	V
V_{TO}	Threshold voltage	T_j=125	0.82	V
R_D	Dynamic resistance	T_j=125	57	m
I_{DRM}	V_D =V_{DRM} V_R =V_{RRM}	T_j=25	5	A
I_{RRM}		T_j=125	0.3	mA

Symbol	Parameter	Value	Unit
$R_{th(j-c)}$	junction to case (AC)	1.7	/W
$R_{th(j-a)}$	junction to ambient (AC)	60	/W

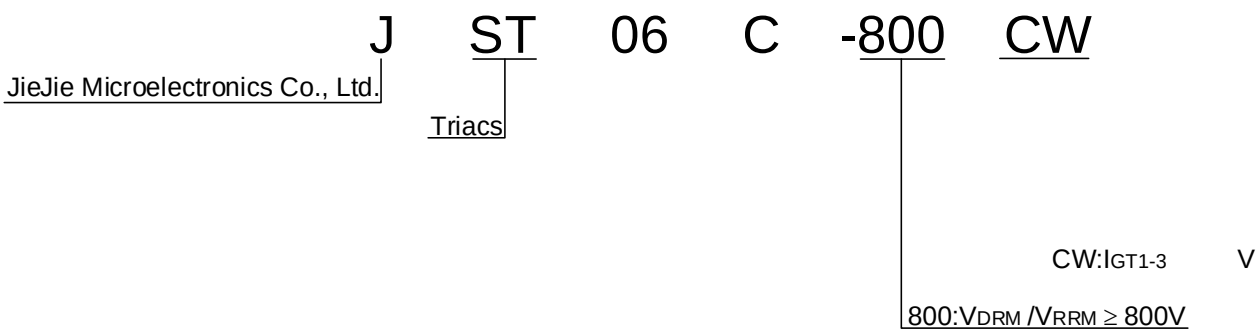
J ST 06 C -800 CW
JieJie Microelectronics Co., Ltd.
Triacs
CW:IGT1-3 V
800:VDRM /VRRM ≥ 800V

FIG.1:

FIG.7 Test circuit for inductive and resistive loads to IEC-61000-4-5 standards

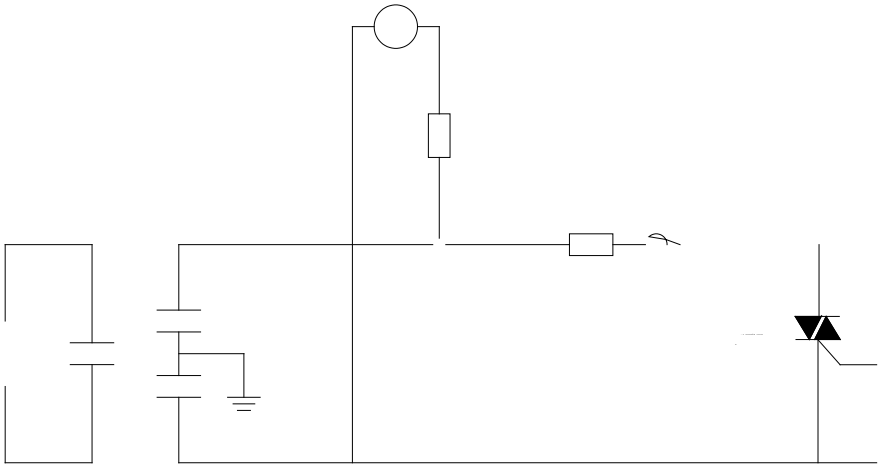

Order code	Voltage V_{DRM}/V_{RRM} (V)	IGT(mA)	Package	Base qty. (pcs)	Delivery mode
		- -			
JST06C-800CW	800	35	TO-220C	50	Tube

Document Revision History

Date	Revision	Changes
Apr.11, 2023	A.1.0	Last updated
Oct.15, 2025	A.1.1	Revise PACKAGE MECHANICAL DATA

Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co., Ltd. assumes no responsibility for the consequences of use without consideration for such information nor use beyond it. Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement.

Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information. This document supersedes and replaces all information previously supplied.

is a registered trademark of Jiangsu JieJie Microelectronics Co., Ltd.